



Цифровой дисплей 9200

Технические характеристики

Архангельск (8182)63-90-72
Астана +7(7172)727-132
Белгород (4722)40-23-64
Брянск (4832)59-03-52
Владивосток (423)249-28-31
Волгоград (844)278-03-48
Вологда (8172)26-41-59
Воронеж (473)204-51-73
Екатеринбург (343)384-55-89
Иваново (4932)77-34-06
Ижевск (3412)26-03-58
Казань (843)206-01-48

Калининград (4012)72-03-81
Калуга (4842)92-23-67
Кемерово (3842)65-04-62
Киров (8332)68-02-04
Краснодар (861)203-40-90
Красноярск (391)204-63-61
Курск (4712)77-13-04
Липецк (4742)52-20-81
Магнитогорск (3519)55-03-13
Москва (495)268-04-70
Мурманск (8152)59-64-93
Набережные Челны (8552)20-53-41

Нижний Новгород (831)429-08-12
Новокузнецк (3843)20-46-81
Новосибирск (383)227-86-73
Орел (4862)44-53-42
Оренбург (3532)37-68-04
Пенза (8412)22-31-16
Пермь (342)205-81-47
Ростов-на-Дону (863)308-18-15
Рязань (4912)46-61-64
Самара (846)206-03-16
Санкт-Петербург (812)309-46-40
Саратов (845)249-38-78

Смоленск (4812)29-41-54
Сочи (862)225-72-31
Ставрополь (8652)20-65-13
Тверь (4822)63-31-35
Томск (3822)98-41-53
Тула (4872)74-02-29
Тюмень (3452)66-21-18
Ульяновск (8422)24-23-59
Уфа (347)229-48-12
Челябинск (351)202-03-61
Череповец (8202)49-02-64
Ярославль (4852)69-52-93

Since 1972



9200 Viscosity and Temperature Transmitter

SOFRASER Patented



TYPICAL APPLICATION FIELDS

Food processing

Printing: inks, varnishes

Packaging: cardboards, glues, inks

Coating: paints, lacquers

Mixing: detergents, hygiene and care products

INSTANTANEOUS AND CONTINUOUS VISCOSITY AND TEMPERATURE MEASUREMENT

The Sofraser **9200** Viscosity and Temperature Transmitter offers state of the art technology and a new design based on 2007 Sofraser patent. The **9200** electronic cabinet processes the vibration of Sofraser **MIVI** sensor.

- **Easy-to-handle electronics**, with standardized outputs and adjusted calibration, the Sofraser **9200** transmitter is the ideal instrument for standard process application.
- **Constant display of the viscosity and temperature**. More than offering visual security in your production, it processes the amplitude variations in order to deliver a linear viscosity response on a digital display.
- **Basic controls and customization features**. Raw data can be displayed and current outputs checked for easy on field diagnosis. Choice of the units and activation of the correlation table are complementary features allowed by **9200**.
- **Easy connection to any data acquisition system or process controller**, for a precise reporting and control with analog and digital outputs.
- **Simple mounting**, it can be fitted on any control panel to optimize your process space.



9200 Viscosity and Temperature Transmitter


STANDARD FEATURES AND SPECIFICATIONS

Inputs	<ul style="list-style-type: none"> Viscosity (analog MIVI sensor) Temperature (Pt100 probe)
Outputs	<ul style="list-style-type: none"> Two independent for viscosity and temperature: 4 - 20 mA $\pm 0,1\%$; Z max.: 350 Ω RS 485, maximum cable length 1000 m, 1 twisted pair cable, 9600 baud
Display	<ul style="list-style-type: none"> 2-line alphanumeric backlighting LCD screen 2 digital buttons Effective dimensions: 64 mm x 15 mm
Operating conditions	<ul style="list-style-type: none"> Working temperature: 0 to 40 °C Process temperature: linearization of viscosity signal by mathematical model and correction of sensor thermal drift up to 200 °C Watertightness: IP20 Sensor / Electronic box cable: 3 m (more on request) To be installed in a safe area with stable temperature
Dimensions & characteristics	<ul style="list-style-type: none"> Panel dimensions: 96 mm x 48 mm Total depth: 120 mm Weight: 240 g Panel mounting with 2 screws
Power	<ul style="list-style-type: none"> 24 VDC (± 2.4 V, stabilized and filtered)
Regulatory	<ul style="list-style-type: none"> CE marked (European conformity)
Options Accessories	<ul style="list-style-type: none"> One calibration point at viscosity and process temperature (up to 100 °C) Insertion in an ex-proof box, for use in hazardous areas Insertion in a watertight box (IP65) Power supply 88 to 264 VAC – 24 VDC Sofraser communication software (data logging, advanced settings, 4/20mA outputs, correlation table, ...)

In 1981, Sofraser invented and patented the world's first vibrating-type viscometer at resonance frequency and remains unsurpassed regarding process reliability and accuracy.

The active part of the sensor, a vibrating rod held in oscillation at resonance frequency is driven by a constant electrical power.

The vibration amplitude varies according to the viscosity of the product in which the rod is immersed.

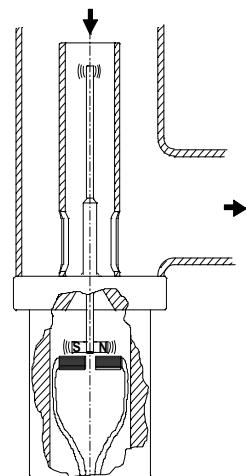

По вопросам продажи и поддержки обращайтесь:

Архангельск (8182)63-90-72
Астана +7(7172)727-132
Белгород (4722)40-23-64
Брянск (4832)59-03-52
Владивосток (423)249-28-31
Волгоград (844)278-03-48
Вологда (8172)26-41-59
Воронеж (473)204-51-73
Екатеринбург (343)384-55-89
Иваново (4932)77-34-06
Ижевск (3412)26-03-58
Казань (843)206-01-48

Калининград (4012)72-03-81
Калуга (4842)92-23-67
Кемерово (3842)65-04-62
Киров (8332)68-02-04
Краснодар (861)203-40-90
Красноярск (391)204-63-61
Курск (4712)77-13-04
Липецк (4742)52-20-81
Магнитогорск (3519)55-03-13
Москва (495)268-04-70
Мурманск (8152)59-64-93
Набережные Челны (8552)20-53-41

Нижний Новгород (831)429-08-12
Новокузнецк (3843)20-46-81
Новосибирск (383)227-86-73
Орел (4862)44-53-42
Оренбург (3532)37-68-04
Пенза (8412)22-31-16
Пермь (342)205-81-47
Ростов-на-Дону (863)308-18-15
Рязань (4912)46-61-64
Самара (846)206-03-16
Санкт-Петербург (812)309-46-40
Саратов (845)249-38-78

Смоленск (4812)29-41-54
Сочи (862)225-72-31
Ставрополь (8652)20-65-13
Тверь (4822)63-31-35
Томск (3822)98-41-53
Тула (4872)74-02-29
Тюмень (3452)66-21-18
Ульяновск (8422)24-23-59
Уфа (347)229-48-12
Челябинск (351)202-03-61
Череповец (8202)49-02-64
Ярославль (4852)69-52-93

Единый адрес для всех регионов: srr@nt-rt.ru || www.sofraser.nt-rt.ru

